

R E P O R T

HS9-139RH – Low Dose Rate Testing @ 36 rad h⁻¹ ESTEC - Contract No. 22051/08/NL/PA

Project Coordinator: Peter Beck

Project Team: Michael Wind
Marcin Latocha

ESA Technical Project Officer: Marc Poizat

1 Document Approval Sheet

Document title:	HS9-139RH – Low Dose Rate Testing @ 36 rad h ⁻¹
Document number:	6_ELDRS_AIT_LDR-C_HS9-139RH_vers1.0.docx
Issue:	1
Revision:	0

Prepared by:	
	Name: Michael Wind
Released by:	
	Name: Peter Beck
Approved by:	
	Name: Marc Poizat

2 Document Change Record

Issue/ Revision	Date	Affected section	Description
1/0	01/12/2011	All	First issue

3 Distribution List

Institution		Copies
AIT	Dr. Peter Beck	1
	Dr. Michael Wind	1
	DI Marcin Latocha	1
ESA	Dr. Marc Poizat	1
	Dr. Ali Zadeh	1

This is a controlled document. Changes and revisions will be issued, as they are approved, to holders of this document.

4 Content

1	Document Approval Sheet	2
2	Document Change Record.....	3
3	Distribution List.....	4
4	Content	5
5	List of Abbreviations	6
6	Scope and Objectives	7
7	General Overview of the Measurements.....	8
8	DUT properties and Sample Enumeration	9
9	Biasing Conditions.....	10
10	Exposure Plan for Low Dose Rate Testing and Cumulative Dose Levels	10
11	Measured Low Dose Rate Data	11
12	Test Plan – Summary.....	12
13	References	13
	Annex A: Reference data obtained with the HS9-139RH microcircuit	14

5 List of Abbreviations

AIT	Austrian Institute of Technology
CMRR	Common Mode Rejection Ratio
CNS	Centre National d'Études Spatiales
CTB	Component Technological Board
CTR	Current Transfer Ratio
DIL	Dual In Line
DEL	Dosimetry Eichlabor (Dosimetry Laboratory)
DUT	Device Under Test
EEE	Electrical Electronic Electromechanical
ELDRS	Enhanced Low Dose Rate Sensitivity
ESA	European Space Agency
ESCC	European Space Component Coordination
ESTEC	European Space Research and Technology Centre
HDR	High Dose Rate
HDR-S	High Dose Rate – exposure of the switching experiment
HZL	Hot Cell Laboratory
IC	Integrated Circuit
LDR	Low Dose Rate
LDR-C	Low Dose Rate – Continuous exposure
LDR-S	Low Dose Rate – exposure of the switching experiment
LET	Linear Energy Transfer
NES	Nuclear Engineering Seibersdorf GmbH
OTA	Operational Transconductance Amplifier
PCB	Printed Circuit Board
PSRR	Power Supply Rejection Ratio
RD	Reference Document
RWG	Radiation Working Group
SCADUS	Smart Control and Development Universal Software
SOW	Statement Of Work
SR	Slew Rate
TID	Total Ionizing Dose
TRR	Test Readiness Review
TN	Technical Note
VEE	Visual Engineering Environment
WO	Work Order
WP	Work Package

6 Scope and Objectives

This report journalizes low dose rate measurements conducted with the HS9-139RH microcircuit at a dose rate of $36 \text{ rad}_{(\text{Si})} \text{ h}^{-1}$. Results obtained from these measurements serve as a reference for an experiment that is investigating the accelerated switching test method (see [BOC04], [BOC05], [DUS08], and [BOC09]). The low dose rate degradation is measured for an extensive set of parameters.

This report serves as measurement protocol and a detailed reference data collection. In detail this report includes:

- General overview of the measurements
- Information on DUT properties (e.g. manufacturer, date code, lot ID)
- Enumeration of the DUTs (naming conventions) during the experiments
- Exposure plan
- Dose levels received by each DUT during the exposure
- Measured low dose rate data for each unit and each characterized parameter

7 General Overview of the Measurements

The low dose rate exposure is using a constant dose rate Co-60 photon field with a dose rate of approximately $10 \text{ mrad}_{(\text{Si})} \text{ s}^{-1}$. The exposure is only interrupted for characterisation of the DUTs, which are performed on average every three to four weeks. In terms of total dose this means that a characterisation is done approximately every $20 \text{ krad}_{(\text{Si})}$. 115 days of continuous exposure are needed to reach the specified total dose level of $100 \text{ krad}_{(\text{Si})}$.

All units are mounted on one PCB that is presented in Figure 1. It is noted that this PCB is used also for other experiments that are carried out in parallel. Biased units are positioned in the centre of the board. They are arranged in columns of five units, in each column the biased units of one device type is mounted. To the left and to the right the unbiased units are mounted on antistatic foam that is enwrapped in aluminium. This ensures that all pins are grounded. The pin to ground resistance is typical less than 4Ω . A RadFET dosimeter is used to monitor the dose received by the DUTs.

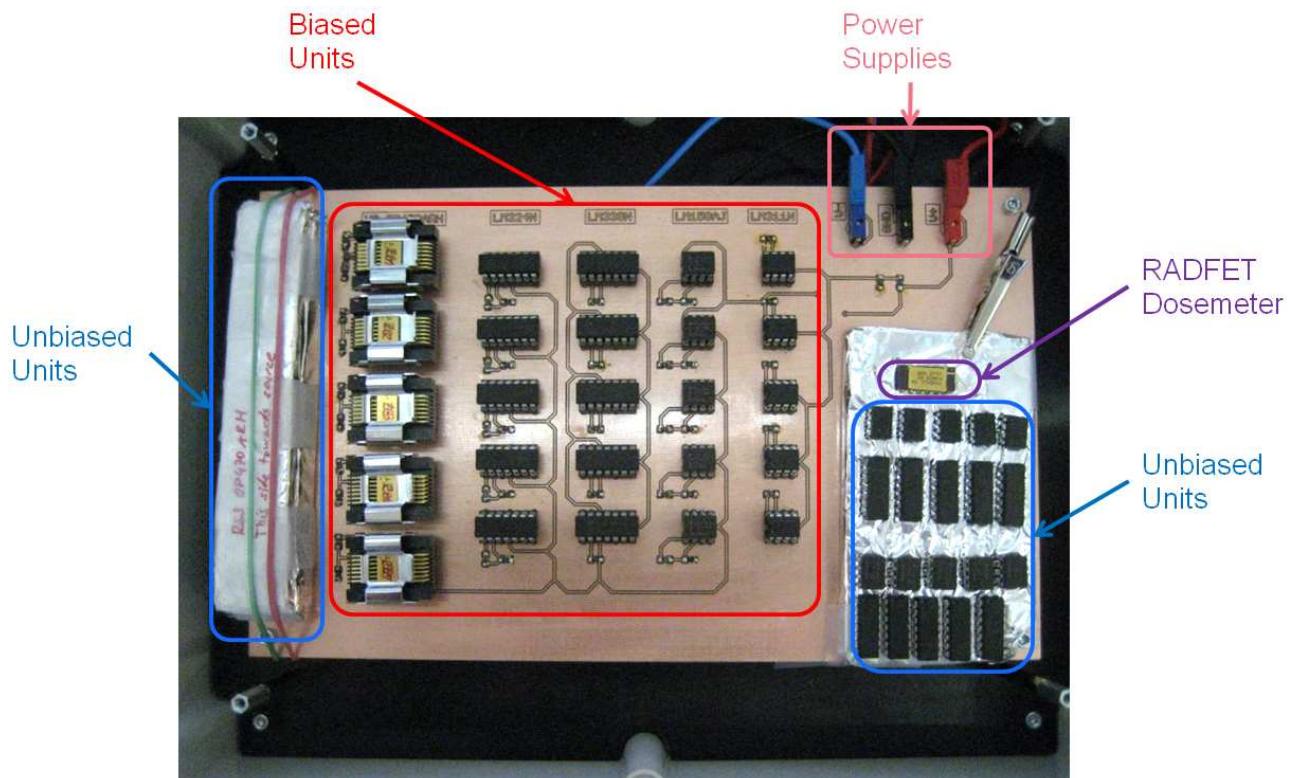


Figure 1: Printed circuit board housing all the biased and unbiased units used for the reference measurements during exposure.

The Co-60 source used for the exposure has an activity of 16.41 Ci (607GBq); the source is mounted in a portable housing that is a gamma ray radiography camera, i.e. in a Gammamat TK-30. The required dose rate of $10 \text{ mrad}_{(\text{Si})} \text{ s}^{-1}$ is available at a distance of approximately 70 cm from the point source.

The source is kept in a shielding made from depleted Uranium encircled by a stainless steel housing. The source can be moved in and out from the shielding via a locating channel. The source is turned off when it is completely retracted and the Uranium shutter is closed. For exposure the shutter is opened and the source is moved within the locating channel into a defined position. The result is a defined radiation field with the shape of a cone. The field will be adjusted in such a way, that it is sufficiently large to irradiate three irradiation boards in parallel. A picture of the setting is shown in Figure 2.

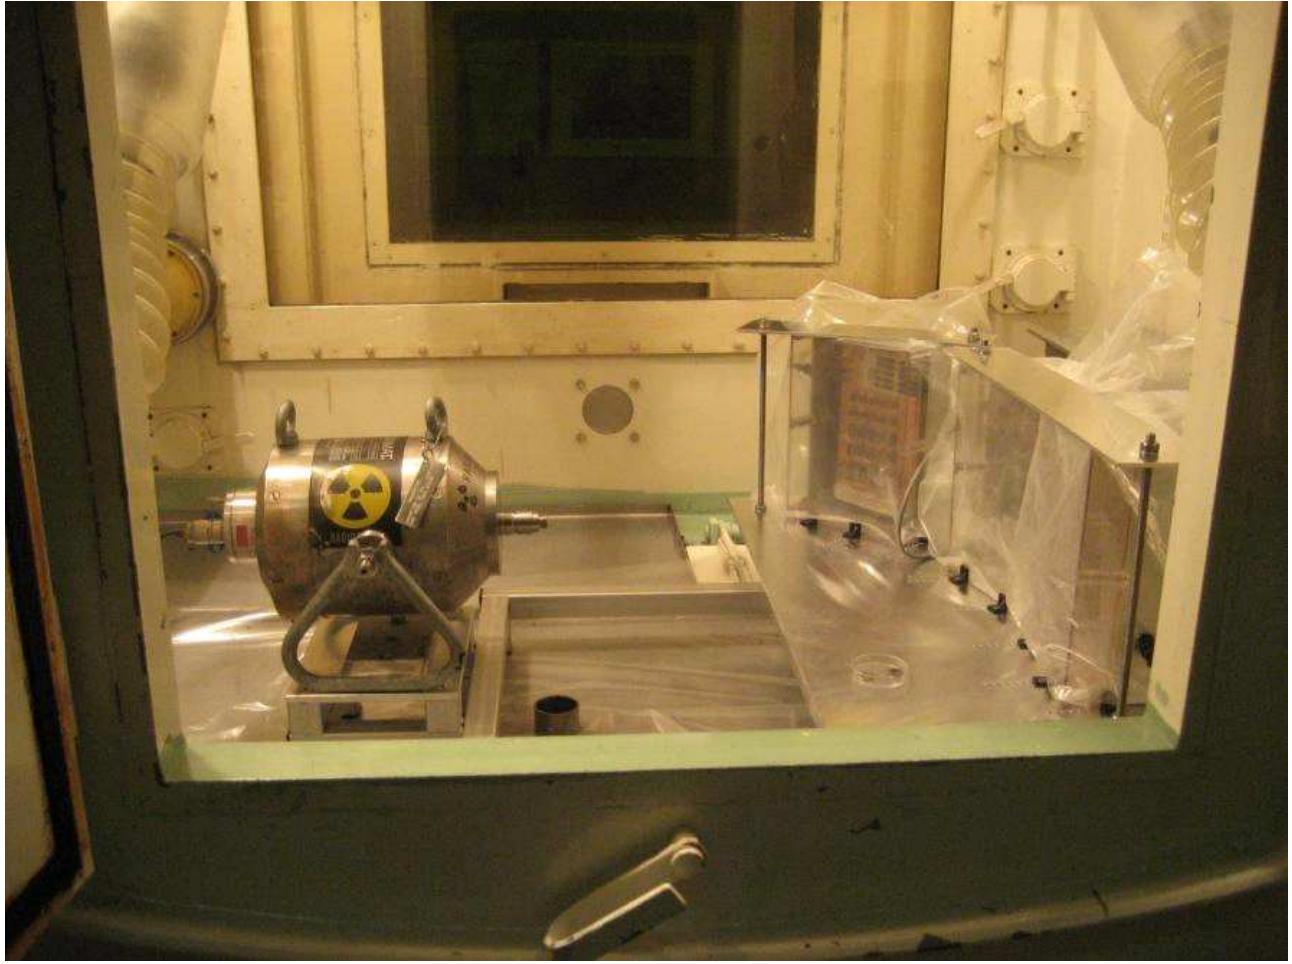


Figure 2: Low dose rate facility; on the left side the radiography camera is positioned, on the right side up to three boxes can be mounted that house one PCB each. The PCB used for the experiments reported here is mounted in the leftmost box.

8 DUT properties and Sample Enumeration

Ten units of the HS9-139RH microcircuit are used for the low dose rate exposure; five units are exposed in biased condition and another five units are exposed in unbiased condition (see Section 9). Some basic device properties are presented in Table 1.

Table 1: Manufacturer, data code, and lot of the units used for reference exposure

Device Type	Manufacturer	D/C	LOT
HS9-139RH	Intersil	N/A	DTCJCDD

The units used for the low dose rate exposures are divided in two groups five units each. One group is exposed in biased condition, the other group in unbiased condition. All the five samples of either group are treated identically. Enumeration of the samples is shown in Table 2.

Table 2: Enumeration of the samples

Exposure Series / Dose Rate	Biasing Condition	Enumeration
Low Dose Rate / 36 rad _(SI) h ⁻¹	biased	BRef1, Bref2, Bref3, Bref4, Bref5
	unbiased	URef1, URef2, URef3, URef4, URef5

9 Biasing Conditions

Tests are conducted in biased and unbiased configuration. In the unbiased configuration all terminals of the microcircuits are held at ground potential. When using biased condition the microcircuits are driven under typical operational conditions. The test circuitry used for the experiments is described in the following.

9.1 Unbiased Configuration

The pins of the microcircuit are held at ground potential during the exposure to the ionizing radiation. Hereby they are mounted in antistatic foam that is enwrapped in aluminium foil. The foil itself is connected to ground potential. The pin to ground resistance is typical well below a few Ohms.

9.2 Biased Configuration

The HS9-139RH microcircuit is a comparator. It is biased in a basic comparator configuration. The supply voltage is set symmetrically at a high level, i.e. at ±15V. The inverting input is grounded during the exposure. The non inverting input is set to a potential V_{in} that is 0.5V (for details see section 12).

10 Exposure Plan for Low Dose Rate Testing and Cumulative Dose Levels

The low dose rate applied to all units during the low dose rate exposure is 10 mrad_(SI) s⁻¹. The exposures are performed in steps of approximately 20 krad_(SI). In between two of such steps the DUTs are removed from the facility and transferred to the lab. An extensive parametric device characterisation is performed to investigate the low dose rate radiation response of the DUTs. After characterisation all the units are remounted in the irradiation facility and the exposure is continued.

Table 3 presents a time table of all exposure steps and the length of the breaks, during which parametric device characterization is done. The cumulative dose to which the DUTs were exposed (at the end of each exposure setup) is presented in the rightmost column.

Table 3: Time table of the low dose rate exposure steps and cumulative dose levels to which the DUTs have been exposed.

Action #	Date	Exposure Stop	Exposure Resume	Duration of Interruption	Cumulative Dose Level
1	4 th May 2011	-----	10:00	-----	0.00 krad _(SI)
2	1 st June 2011	11:45	16:00	4:15	21.68 krad _(SI)
3	28 th June 2011	10:00	13:50	3:50	42.35 krad _(SI)
4	20 th July 2011	10:15	16:00	5:45	59.22 krad _(SI)
5	18 th August 2011	10:10	15:30	5:20	81.44 krad _(SI)
6	31 st August 2011	10:30	-----	-----	91.32 krad _(SI)

11 Measured Low Dose Rate Data


The parametric device degradation of all units is measured with a parameter analyzer. Measurement Data are presented as parameter value vs. dose (in units of krad_(Si)) for all parameters presented in Table 4. Data are presented as tabled values as well as in plots. For each device type and biasing condition five units are irradiated under identical conditions. The tabled data present the results of all five units as well as average values and the standard deviations. In the plots only the average values are presented. Uncertainty bars are calculated as the standard deviation.

The reference data obtained for HS9-139RH microcircuit is presented in Annex A: Reference data obtained with the HS9-139RH microcircuit.

Table 4: Parameters measured

Electric Parameter used for the characterization of the low dose rate degradation	Symbol
Offset Voltage	V_{OS}
Positive Supply Current	I_{S+}
Negative Supply Current	I_{S-}
Input Bias Current at the Non Inverting Input	I_{b+}
Input Bias Current at the Inverting Input	I_{b-}
Input Bias Current	I_b
Input Offset Current	I_{OS}
Open Loop Gain	A_{VO}
Common Mode Rejection Ratio	CMRR
Positive Power Supply Rejection Ratio	PSRR
Negative Power Supply Rejection Ratio	PSRR-
Positive Output Voltage Swing	V_{O+}
Negative Output Voltage Swing	V_{O-}
Positive Short Circuit Current	I_{SC+}
Negative Short Circuit Current	I_{SC-}
Negative Short Circuit Current	I_{SC-}

12 Test Plan – Summary

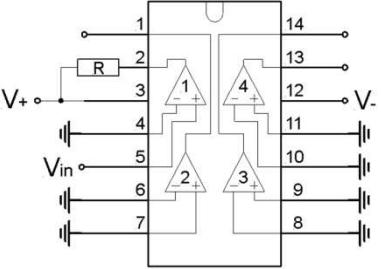
 AUSTRIAN INSTITUTE OF TECHNOLOGY TOMORROW TODAY			Total Dose Test Report For: HS9-139RH			
Family: Comparator	Lot Code: DTCJCDD	Manufacturer: Intersil				
Package: Flatpack	Manufacturing Date Code: N/A	Contact Person: Nick van Vonna Address: 1001 Murphy Ranch Road, Milpitas, CA 95035, USA				
Test Facility Name: Nuclear Engineering Seibersdorf GesmbH	Irradiation Test Plan: No.: AIT-6 Iss.: 1 Rev.: 0					
Address: Forschungszentrum Seibersdorf, Seibersdorf, A-2444						
Irradiation Conditions: Biased (In-Situ) & Unbiased	Biased Configuration: Supply Voltages: $V_{\pm} \pm 15V$ V_{in}: 0.5V	Schematic of Test Circuitry: 				
Electrical Measurement: Parameters Tested: V_{OS} , I_{S+} , I_S , I_{b+} , I_{b-} , I_b , I_{OS} , A_{VO} , CMRR, PSRR, PSRR-, V_{O+} , V_O , I_{SC+} , I_{SC} . Temp: 26 °C	Resistors: $R: 15k\Omega$ Unbiased Configuration: All terminals grounded; pin to ground resistance typically $< 4 \Omega$					
Facilities: Hot Cell Laboratory of the Nuclear Engineering Seibersdorf GesmbH						
Source: gamma	Energy: Co-60 (1.17 MeV, 1.33MeV)	Dose Rate: $8.94 \text{ mrad}_{(\text{Si})} \text{ s}^{-1}$				
Absorber Material: PMMA	Thickness: 3mm	Duration: 129.5 d				
Anneal Test: No						
Irradiation Sequence						
Step No.	Description	Begin	End	Exposure Time		
1	Long term exposure Exposure is interrupted several times for ~2 hours for characterization of the electrical parameters. Electrical characterization is done at dose levels of: 21.7, 42.4, 59.2, 81.4, and 91.3 krad _(Si)	4 th May 2011	31 st August 2011	119 d		
Irradiation Test Facility: Responsible Name: Michael Wind Telephone: +43 (0) 50550 - 4310		Electrical Test: Responsible Name: Michael Wind Telephone: +43 (0) 50550 - 4310				

13 References


- BOC04 J. Boch, F. Saigné, R.D. Schrimpf, D.M. Fleetwood, S. Ducret, L. Dusseau, J.P., David, J. Fesquet, J. Gasiot, R. Ecoffet, Effect of Switching From High to Low Dose Rate on Linear Bipolar Technology Radiation response, IEEE-TNS, vol.51(5), p.2896, October 2004
- BOC05 J. Boch, F. Saigné, R.D. Schrimpf, J.-R. Vaillé, L. Dusseau, S. Ducret, M. Bernard, E. Lorfèvre, and C. Chatry, Estimation of Low-Dose-Rate Degradation on Bipolar Linear Integrated Circuits Using Switching Experiments, IEEE-TNS, vol. 52 (6), p. 2616, December 2005
- BOC09 J. Boch, Y. Gonzalez Velo, F. Saigné, N. J-H. Roche, R.D. Schrimpf, J.-R. Vaillé, L. Dusseau, C. Chatry, E. Lorfèvre, R. Ecoffet, A.D. Touboul, The use of a Dose- Rate Switching Technique to Characterize Bipolar Devices, submitted to IEEETNS, accepted for NSREC, 2009
- DUS08 L. Dusseau, M. Bernard, J. Boch, Y. Gonzalez velo, N. Roche, E. Lorfèvre, F. Bezerra, P. Calvel, R. Marec, F. Saigné, Review and Analysis of the Radiation - Induced Degradation Observed for the Input Bias Current of Linear Integrated Circuits, IEEE-TNS, vol. 55 (6), p.3174, December 2008
- INT09 Intersil Americas Inc., Radiation Hardened Quad Voltage Comparator, datasheet, 2009

Annex A: Reference data obtained with the HS9-139RH microcircuit


Raw Data	—	Device Type: HS9-139RH	Parameter: Vos (mV)	Biasing Condition: Biased
LDR-C Reference		Dose (krad)	0.00	21.68
		BRef1	-13.65	-5.42
		BRef2	-13.63	-5.30
		BRef3	-11.95	-5.64
		BRef4	-13.24	-7.23
		BRef5	-13.63	-7.20
		Mean	-13.22	-6.16
		StdDev	0.73	0.97
				0.71
				0.82
				1.10

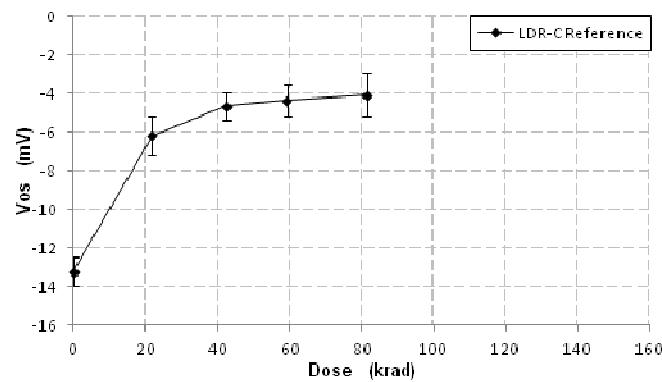


Raw Data	—	Device Type: HS9-139RH	Parameter: Is+ (mA)	Biasing Condition: Biased
LDR-C Reference		Dose (krad)	0.00	21.68
		BRef1	0.82	0.82
		BRef2	0.82	0.81
		BRef3	0.81	0.81
		BRef4	0.80	0.80
		BRef5	0.80	0.80
		Mean	0.81	0.81
		StdDev	7.83E-03	5.81E-03
				5.51E-03
				4.21E-03
				3.24E-03

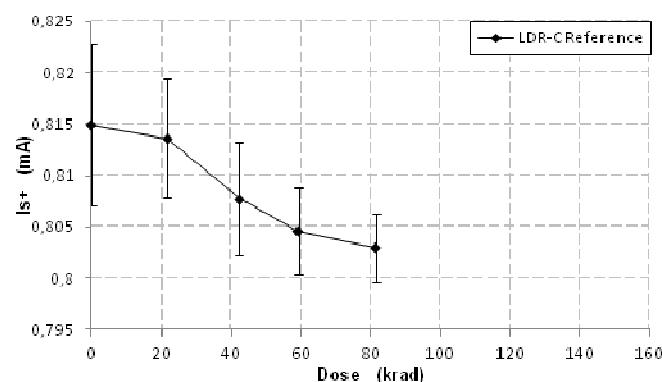


Raw Data		Device Type: HS9-139RH			Parameter: Is- (mA)	Biasing Condition: Biased
LDR-C Reference	Dose (krad)	0.00	21.68	42.34	59.22	81.43
	BRef1	-0.81	-0.80	-0.80	-0.79	-0.79
	BRef2	-0.81	-0.80	-0.80	-0.79	-0.79
	BRef3	-0.80	-0.80	-0.79	-0.78	-0.78
	BRef4	-0.80	-0.79	-0.79	-0.78	-0.78
	BRef5	-0.79	-0.79	-0.79	-0.78	-0.78
Mean		-0.80	-0.80	-0.79	-0.79	-0.78
StdDev		7.98E-03	6.03E-03	5.60E-03	4.14E-03	3.33E-03

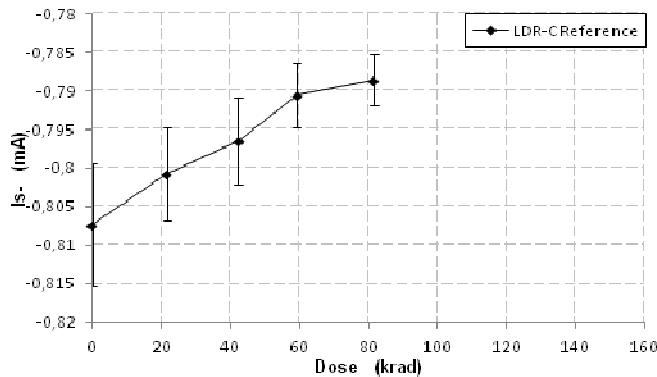


Raw Data		Device Type: HS9-139RH			Parameter: Ib+ (uA)	Biasing Condition: Biased
LDR-C Reference	Dose (krad)	0.00	21.68	42.34	59.22	81.43
	BRef1	-0.43	-0.11	-0.10	-0.11	-0.12
	BRef2	-0.42	-0.11	-0.11	-0.12	-0.13
	BRef3	-0.39	-0.11	-0.11	-0.11	-0.12
	BRef4	-0.42	-0.13	-0.11	-0.11	-0.11
	BRef5	-0.42	-0.13	-0.11	-0.11	-0.11
Mean		-0.41	-0.12	-0.11	-0.11	-0.12
StdDev		1.59E-02	1.15E-02	4.46E-03	3.80E-03	7.19E-03

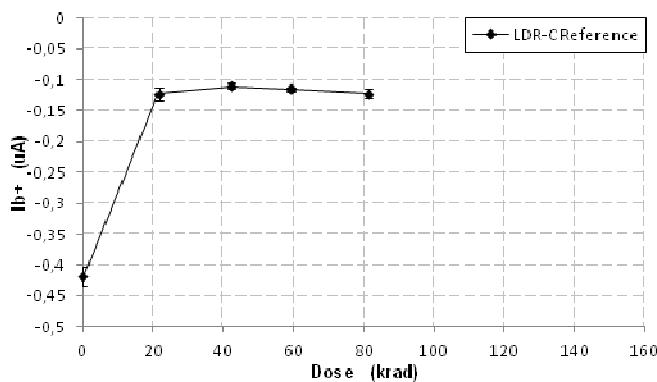


Raw Data		Device Type: HS9-139RH			Parameter: Ib- (uA)	Biasing Condition: Biased
LDR-C Reference	Dose (krad)	0.00	21.68	42.34	59.22	81.43
	BRef1	-0.03	-0.06	-0.07	-0.08	-0.10
	BRef2	-0.03	-0.06	-0.07	-0.08	-0.10
	BRef3	-0.03	-0.05	-0.07	-0.08	-0.09
	BRef4	-0.03	-0.05	-0.06	-0.06	-0.07
	BRef5	-0.03	-0.05	-0.06	-0.06	-0.07
Mean		-0.03	-0.05	-0.06	-0.07	-0.09
StdDev		6.05E-04	5.37E-03	7.41E-03	1.11E-02	1.42E-02

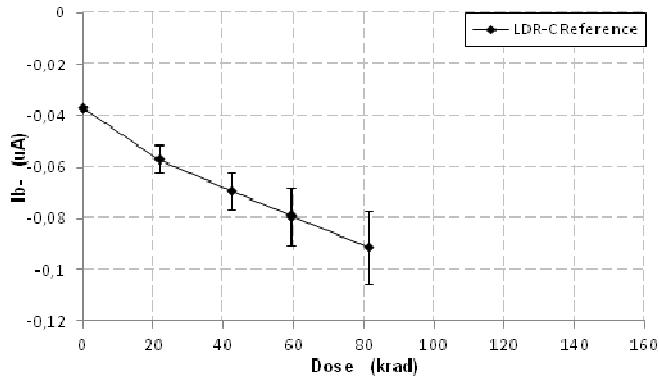


Raw Data		Device Type: HS9-139RH			Parameter: Ib (uA)	Biasing Condition: Biased
LDR-C Reference	Dose (krad)	0.00	21.68	42.34	59.22	81.43
	BRef1	-0.23	-0.08	-0.08	-0.10	-0.11
	BRef2	-0.23	-0.08	-0.09	-0.10	-0.11
	BRef3	-0.21	-0.08	-0.09	-0.09	-0.11
	BRef4	-0.22	-0.09	-0.08	-0.08	-0.09
	BRef5	-0.22	-0.09	-0.08	-0.08	-0.09
Mean		-0.22	-0.08	-0.08	-0.09	-0.10
StdDev		7.72E-03	3.20E-03	3.02E-03	7.37E-03	1.05E-02

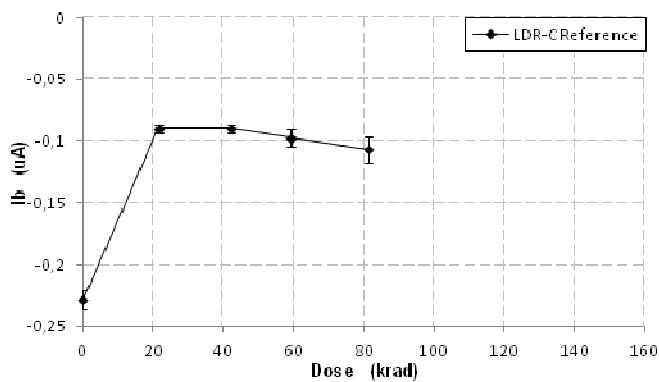


Raw Data		Device Type: HS9-139RH		Parameter: Ios (uA)	Biasing Condition: Biased
LDR-C Reference	Dose (krad)	0.00	21.68	42.34	59.22
	BRef1	-0.34	-0.05	-0.02	-0.03
	BRef2	-0.34	-0.05	-0.03	-0.02
	BRef3	-0.30	-0.05	-0.03	-0.03
	BRef4	-0.33	-0.08	-0.05	-0.04
	BRef5	-0.33	-0.08	-0.05	-0.03
	Mean	-0.33	-0.06	-0.04	-0.03
StdDev		1.41E-02	1.80E-02	9.63E-03	6.33E-03

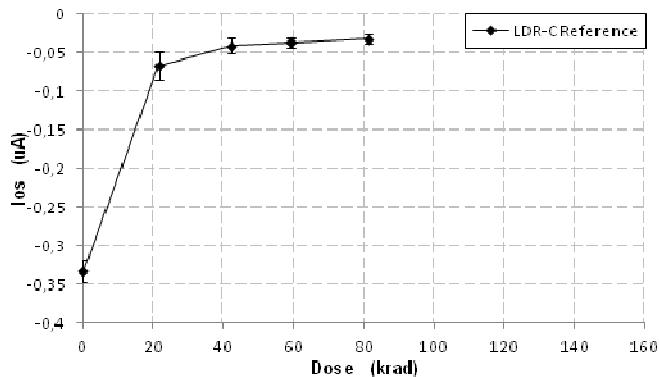


Raw Data		Device Type: HS9-139RH		Parameter: Avo (dB)	Biasing Condition: Biased
LDR-C Reference	Dose (krad)	0.00	21.68	42.34	59.22
	BRef1	56.62	67.42	69.54	70.63
	BRef2	56.81	67.61	69.54	69.59
	BRef3	57.48	66.92	69.12	69.27
	BRef4	57.08	64.3	67.16	67.39
	BRef5	56.95	64.37	67.54	68.49
	Mean	56.98	66.12	68.58	69.07
StdDev		0.32	1.65	1.14	1.21

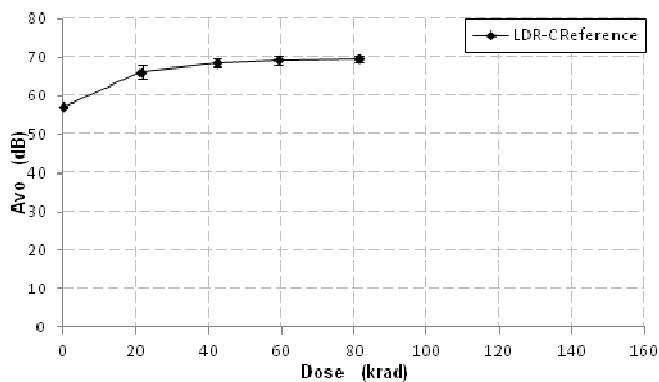


Raw Data	Device Type: HS9-139RH	Parameter: CMRR (dB)	Biasing Condition: Biased	
LDR-C Reference	Dose (krad)	0.00	21.68	42.34
	BRef1	89.47	103.4	97.05
	BRef2	88.68	98.05	94.6
	BRef3	89.96	112.6	96.5
	BRef4	86.67	93.91	103.5
	BRef5	88.66	90.13	99.02
	Mean	88.68	99.61	98.13
StdDev		1.25	8.77	3.38
			103.19	97.03
			8.43	2.99

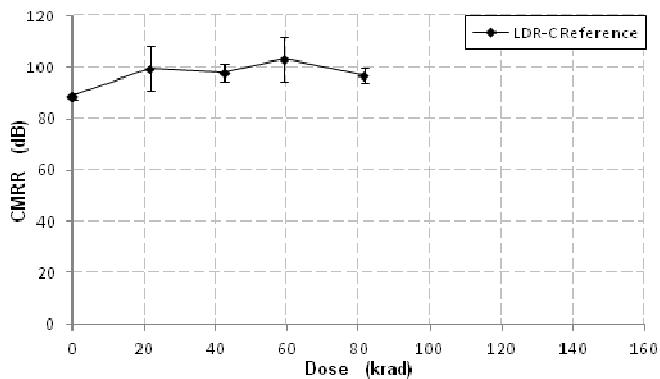


Raw Data	Device Type: HS9-139RH	Parameter: PSRR (dB)	Biasing Condition: Biased	
LDR-C Reference	Dose (krad)	0.00	21.68	42.34
	BRef1	62.16	71.79	74.39
	BRef2	62.23	71.82	74.47
	BRef3	62.66	71.23	74.03
	BRef4	62.09	68.76	72.47
	BRef5	62.12	68.7	72.44
	Mean	62.25	70.46	73.56
StdDev		0.23	1.59	1.02
			74.33	74.73
			0.76	0.59

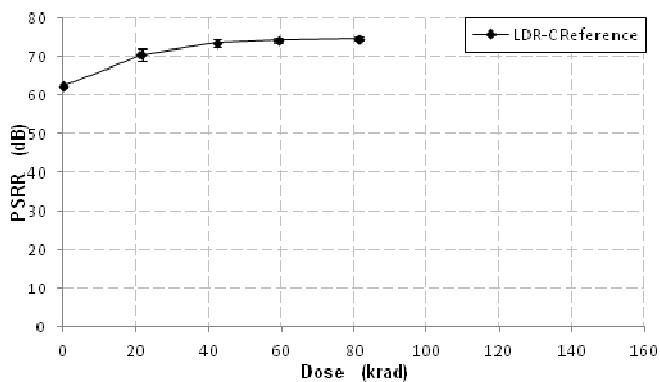


Raw Data	Device Type: HS9-139RH	Parameter: PSSR- (dB)	Biasing Condition: Biased	
LDR-C Reference	Dose (krad)	0.00	21.68	42.34
BRef1	70.94	76.03	77.26	77.71
BRef2	71.26	76.2	77.13	77.42
BRef3	71.47	75.8	77.16	77.54
BRef4	71.47	74.69	75.76	76
BRef5	71.36	75.2	76.12	76.35
Mean	71.3	75.58	76.68	77.00
StdDev	0.21	0.62	0.69	0.77
				81.43

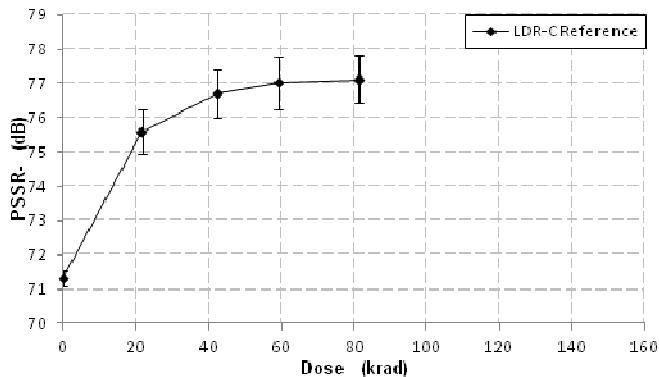


Raw Data	Device Type: HS9-139RH	Parameter: Vo+ (V)	Biasing Condition: Biased	
LDR-C Reference	Dose (krad)	0.00	21.68	42.34
BRef1	14.34	14.41	14.4	14.49
BRef2	14.33	14.41	14.39	14.49
BRef3	14.34	14.42	14.39	14.49
BRef4	14.34	14.39	14.4	14.49
BRef5	14.34	14.39	14.4	14.49
Mean	14.33	14.40	14.39	14.49
StdDev	4.47E-03	1.34E-02	5.47E-03	0.00
				81.43

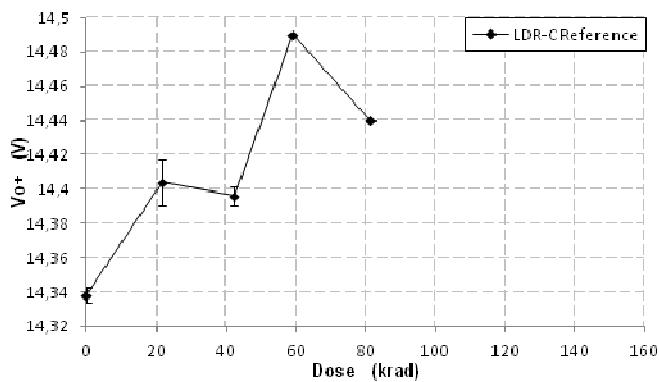


Raw Data	Device Type: HS9-139RH	Parameter: Vo- (V)	Biasing Condition: Biased
LDR-C Reference			
Dose (krad)	0.00	21.68	42.34
BRef1	-14.74	-14.68	-14.7
BRef2	-14.74	-14.67	-14.7
BRef3	-14.74	-14.67	-14.7
BRef4	-14.74	-14.68	-14.7
BRef5	-14.74	-14.68	-14.69
Mean	-14.74	-14.67	-14.7
StdDev	0.00	5.47E-03	0.00

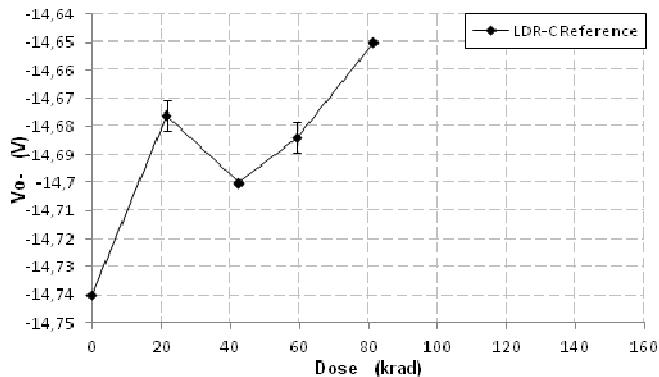


Raw Data	Device Type: HS9-139RH	Parameter: Isc+ (mA)	Biasing Condition: Biased
LDR-C Reference			
Dose (krad)	0.00	21.68	42.34
BRef1	-0.03	-0.03	-0.03
BRef2	-0.03	-0.03	-0.03
BRef3	-0.03	-0.03	-0.03
BRef4	-0.03	-0.03	-0.03
BRef5	-0.02	-0.03	-0.03
Mean	-0.03	-0.03	-0.03
StdDev	3.39E-03	6.83E-05	5.54E-05

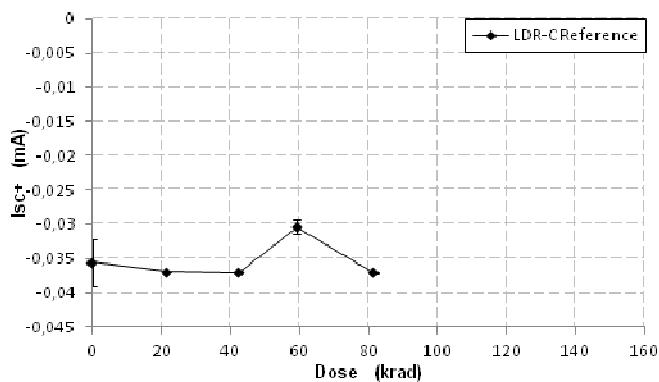


Raw Data	—	Device Type: HS9-139RH	Parameter: Isc- (mA)	Biasing Condition: Biased
LDR-C Reference	Dose (krad)	0.00	21.68	42.34
	BRef1	-77.27	-76.94	-76.86
	BRef2	-77.61	-77.28	-77.21
	BRef3	-77.3	-76.97	-76.92
	BRef4	-77.47	-77.14	-77.1
	BRef5	-77.51	-77.2	-77.16
	Mean	-77.43	-77.10	-77.05
	StdDev	0.14	0.14	0.15
				81.43
				-76.88
				-76.73
				-77.22
				-77.07
				-76.78
				-76.98
				-77.02
				-76.91
				0.15

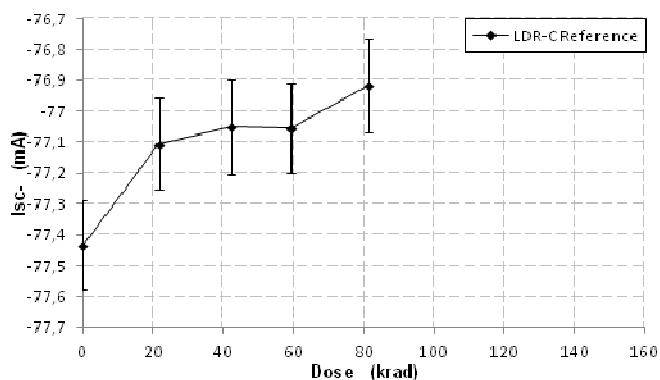


Raw Data	Device Type: HS9-139RH	Parameter: Vos (mV)	Biasing Condition: Unbiased		
LDR-C Reference	Dose (krad)	0.00	21.68	42.34	59.22
	URef1	-12.59	-6.53	-4.71	-4.46
	URef2	-11.88	-5.61	-4.50	-4.41
	URef3	-12.62	-6.26	-4.86	-4.71
	URef4	-14.53	-5.81	-4.67	-4.55
	URef5	-13.79	-6.19	-4.91	-4.74
	Mean	-13.08	-6.08	-4.73	-4.57
		StdDev	1.06	0.36	0.14
					0.16

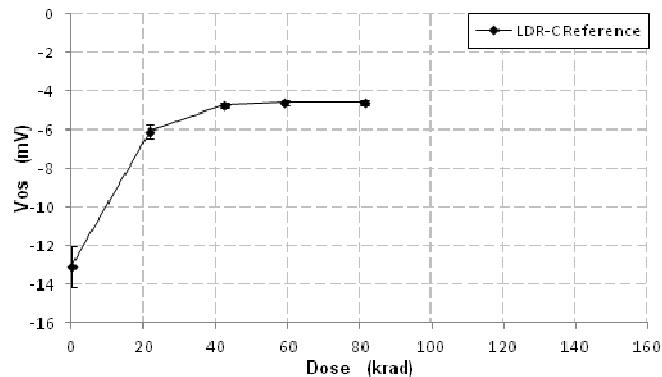


Raw Data	Device Type: HS9-139RH	Parameter: Is+ (mA)	Biasing Condition: Unbiased		
LDR-C Reference	Dose (krad)	0.00	21.68	42.34	59.22
	URef1	0.79	0.79	0.79	0.78
	URef2	0.79	0.79	0.78	0.78
	URef3	0.81	0.81	0.80	0.80
	URef4	0.80	0.80	0.79	0.79
	URef5	0.80	0.80	0.80	0.80
	Mean	0.80	0.80	0.79	0.79
		StdDev	8.04E-03	7.64E-03	8.05E-03
					7.97E-03
					8.02E-03

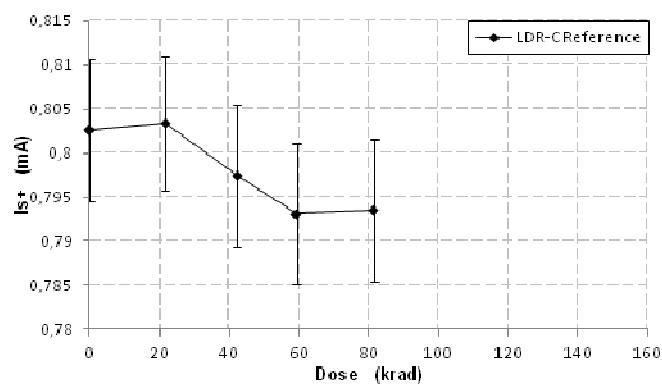


Raw Data	Device Type: HS9-139RH	Parameter: Is- (mA)	Biasing Condition: Unbiased	
LDR-C Reference	Dose (krad)	0.00	21.68	42.34
	URef1	-0.79	-0.78	-0.78
	URef2	-0.78	-0.78	-0.77
	URef3	-0.80	-0.79	-0.79
	URef4	-0.79	-0.78	-0.78
	URef5	-0.80	-0.79	-0.78
	Mean	-0.79	-0.79	-0.78
StdDev		7.62E-03	7.51E-03	7.96E-03
			7.54E-03	7.83E-03

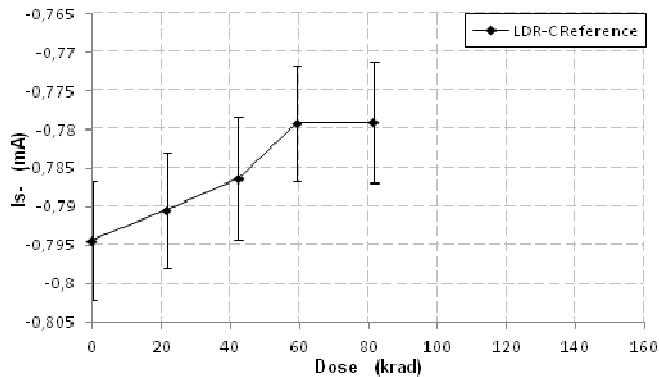


Raw Data	Device Type: HS9-139RH	Parameter: Ib+ (uA)	Biasing Condition: Unbiased	
LDR-C Reference	Dose (krad)	0.00	21.68	42.34
	URef1	-0.43	-0.12	-0.10
	URef2	-0.31	-0.10	-0.09
	URef3	-0.42	-0.11	-0.10
	URef4	-0.43	-0.10	-0.10
	URef5	-0.41	-0.11	-0.10
	Mean	-0.40	-0.11	-0.10
StdDev		4.92E-02	7.72E-03	2.76E-03
			3.80E-03	4.87E-03

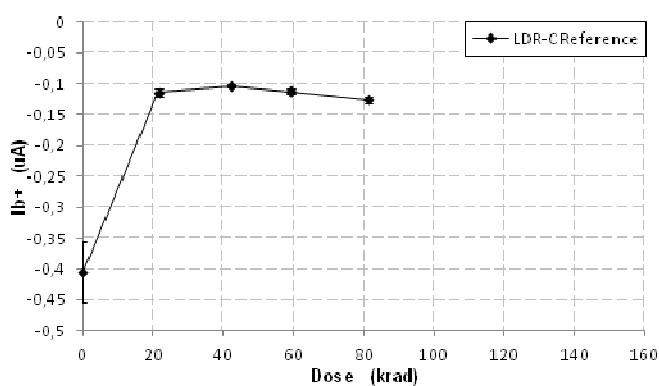


Raw Data	Device Type: HS9-139RH	Parameter: Ib- (uA)	Biasing Condition: Unbiased	
LDR-C Reference	Dose (krad)	0.00	21.68	42.34
	URef1	-0.03	-0.05	-0.06
	URef2	-0.03	-0.05	-0.06
	URef3	-0.03	-0.05	-0.06
	URef4	-0.03	-0.05	-0.07
	URef5	-0.03	-0.05	-0.06
	Mean	-0.03	-0.05	-0.06
StdDev		7.20E-04	0.00	2.84E-03
			4.54E-03	4.90E-03

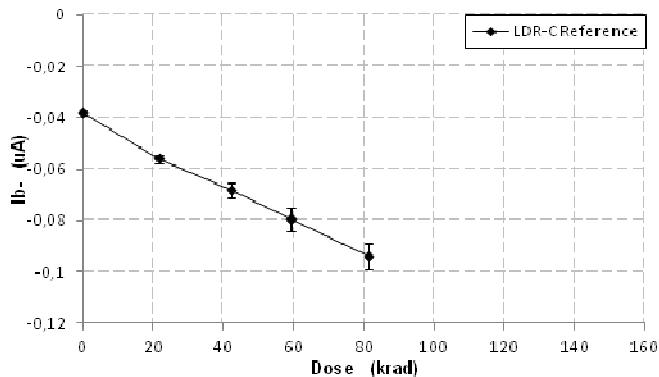


Raw Data	Device Type: HS9-139RH	Parameter: Ib (uA)	Biasing Condition: Unbiased	
LDR-C Reference	Dose (krad)	0.00	21.68	42.34
	URef1	-0.23	-0.08	-0.08
	URef2	-0.17	-0.07	-0.08
	URef3	-0.23	-0.08	-0.08
	URef4	-0.23	-0.08	-0.08
	URef5	-0.22	-0.08	-0.08
	Mean	-0.22	-0.08	-0.08
StdDev		2.43E-02	0.00	2.42E-03
			4.09E-03	4.70E-03

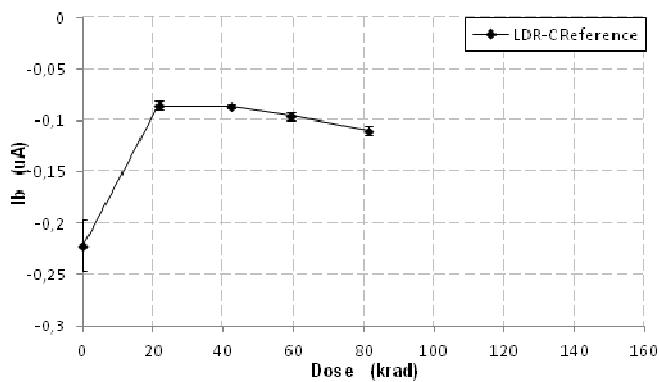


Raw Data	Device Type: HS9-139RH	Parameter: Ios (uA)	Biasing Condition: Unbiased	
LDR-C Reference	Dose (krad)	0.00	21.68	42.34
	URef1	-0.34	-0.06	-0.03
	URef2	-0.24	-0.04	-0.03
	URef3	-0.32	-0.06	-0.03
	URef4	-0.34	-0.04	-0.03
	URef5	-0.32	-0.06	-0.03
	Mean	-0.31	-0.05	-0.03
StdDev		4.34E-02	9.41E-03	2.47E-03
				2.25E-03

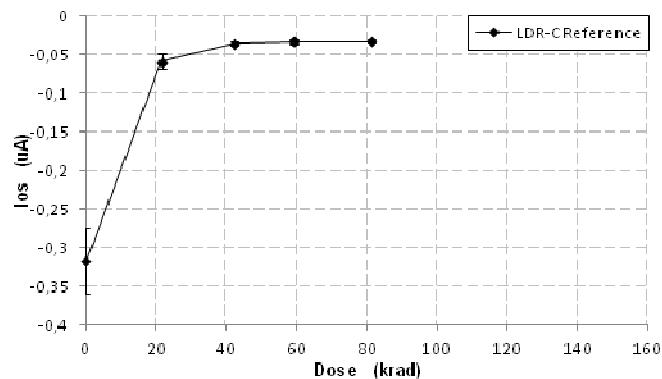


Raw Data	Device Type: HS9-139RH	Parameter: Avo (dB)	Biasing Condition: Unbiased	
LDR-C Reference	Dose (krad)	0.00	21.68	42.34
	URef1	56.82	66.05	68.84
	URef2	59.57	67.43	71.01
	URef3	56.98	66.15	69.77
	URef4	56.97	66.81	70.38
	URef5	56.92	66.3	69.7
	Mean	57.45	66.54	69.94
StdDev		1.18	0.57	0.81
				0.58
				0.63

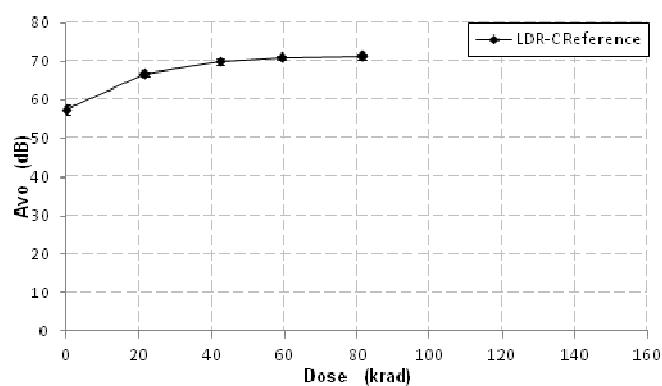


Raw Data	Device Type: HS9-139RH	Parameter: CMRR (dB)	Biasing Condition: Unbiased	
LDR-C Reference	Dose (krad)	0.00	21.68	42.34
URef1	87.56	100.4	101.1	106.9
URef2	107.2	100.9	113	102.3
URef3	89.23	95.6	99.72	109
URef4	91.92	101	111.6	124
URef5	89.84	93.28	96.96	106.7
Mean	93.15	98.23	104.47	109.78
StdDev	8.00	3.56	7.31	8.31
				102.9
				2.57

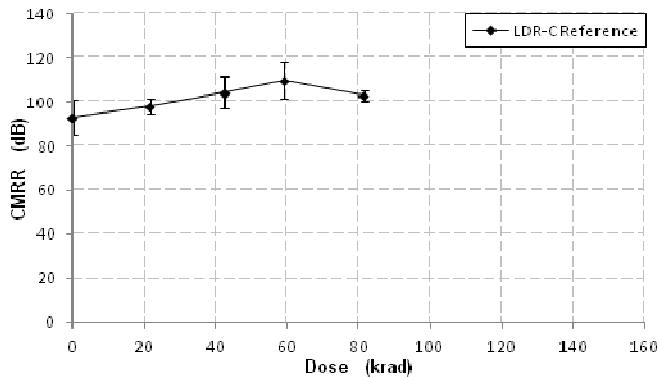


Raw Data	Device Type: HS9-139RH	Parameter: PSRR (dB)	Biasing Condition: Unbiased	
LDR-C Reference	Dose (krad)	0.00	21.68	42.34
URef1	62.09	70.13	73.75	74.54
URef2	64	72.75	75.86	76.23
URef3	62.3	70.57	74.51	75.38
URef4	62.03	71.51	74.75	75.44
URef5	62.12	70.33	73.97	74.95
Mean	62.50	71.05	74.56	75.30
StdDev	0.84	1.08	0.82	0.63
				75.32
				0.49

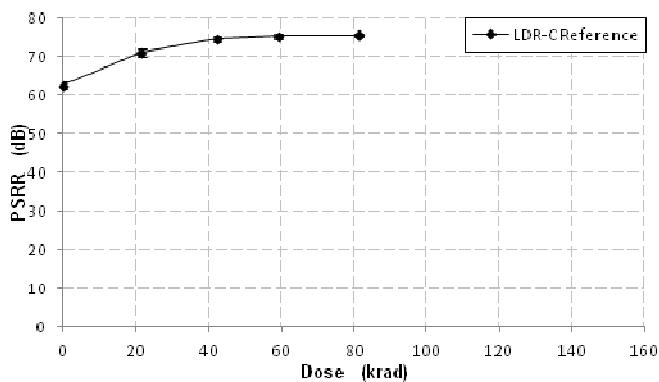


Raw Data	— Device Type: HS9-139RH	Parameter: PSSR- (dB)	Biasing Condition: Unbiased	
LDR-C Reference	Dose (krad)	0.00	21.68	42.34
	URef1	71.32	75.7	76.14
	URef2	71.6	76.25	76.93
	URef3	71.56	76.29	76.94
	URef4	71.51	76.96	77.1
	URef5	71.49	76.85	77.35
	Mean	71.49	76.41	76.89
StdDev		0.10	0.50	0.45
			0.44	0.47

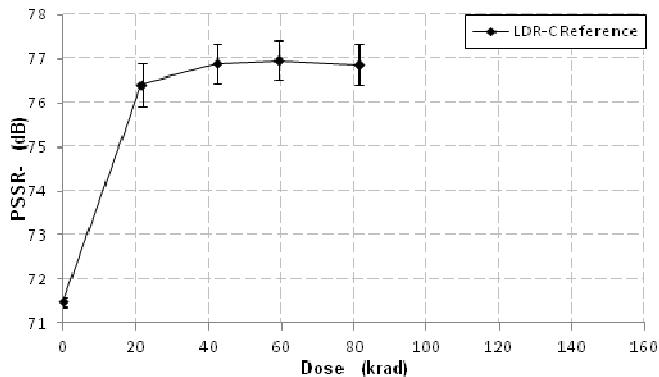


Raw Data	— Device Type: HS9-139RH	Parameter: Vo+ (V)	Biasing Condition: Unbiased	
LDR-C Reference	Dose (krad)	0.00	21.68	42.34
	URef1	14.34	14.42	14.39
	URef2	14.34	14.42	14.4
	URef3	14.33	14.42	14.39
	URef4	14.34	14.42	14.39
	URef5	14.34	14.42	14.39
	Mean	14.33	14.42	14.39
StdDev		4.47E-03	1.98E-15	4.47E-03
			0.00	1.98E-15

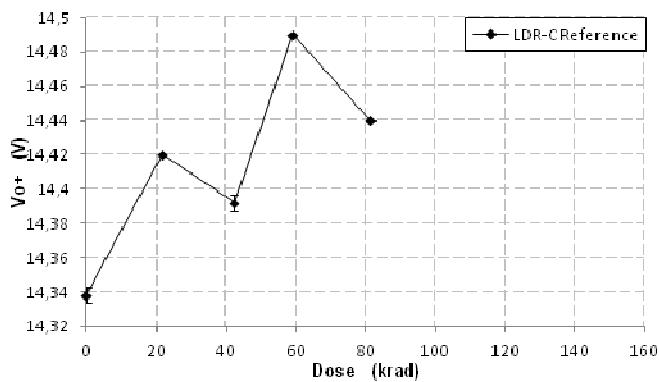


Raw Data	—	Device Type: HS9-139RH	Parameter: Vo- (V)	Biasing Condition: Unbiased	
LDR-C Reference	Dose (krad)	0.00	21.68	42.34	59.22
	URef1	-14.73	-14.66	-14.69	-14.67
	URef2	-14.74	-14.67	-14.69	-14.68
	URef3	-14.74	-14.67	-14.69	-14.67
	URef4	-14.73	-14.67	-14.69	-14.67
	URef5	-14.74	-14.67	-14.69	-14.68
	Mean	-14.73	-14.66	-14.69	-14.67
StdDev		5.47E-03	4.47E-03	1.98E-15	5.47E-03

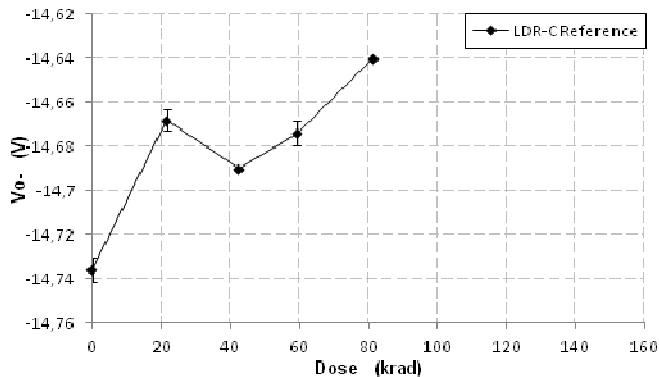

Raw Data	—	Device Type: HS9-139RH	Parameter: Isc+ (mA)	Biasing Condition: Unbiased	
LDR-C Reference	Dose (krad)	0.00	21.68	42.34	59.22
	URef1	-0.03	-0.03	-0.03	-0.03
	URef2	-0.03	-0.03	-0.03	-0.03
	URef3	-0.03	-0.03	-0.03	-0.03
	URef4	-0.03	-0.03	-0.03	-0.03
	URef5	-0.03	-0.03	-0.03	-0.03
	Mean	-0.03	-0.03	-0.03	-0.03
StdDev		9.88E-05	1.05E-04	1.01E-04	3.82E-04

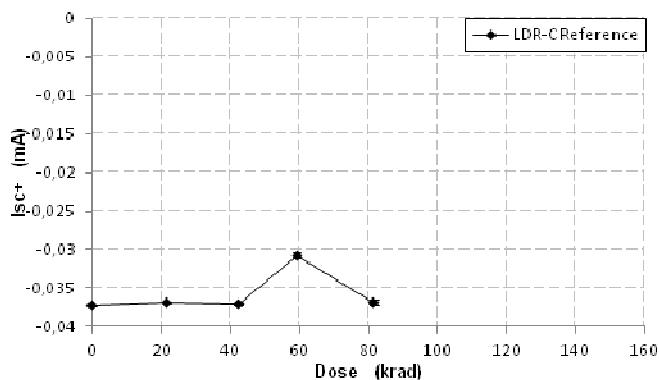

Raw Data	—	Device Type: HS9-139RH	Parameter: Isc- (mA)	Biasing Condition: Unbiased	
LDR-C Reference	Dose (krad)	0.00	21.68	42.34	59.22
	URef1	-77.13	-76.71	-76.69	-76.73
	URef2	-77.72	-77.33	-77.34	-77.37
	URef3	-77.43	-77.05	-77.03	-77.07
	URef4	-77.59	-77.2	-77.17	-77.22
	URef5	-77.67	-77.3	-77.28	-77.31
	Mean	-77.50	-77.11	-77.10	-77.14
StdDev		0.23	0.25	0.25	0.25

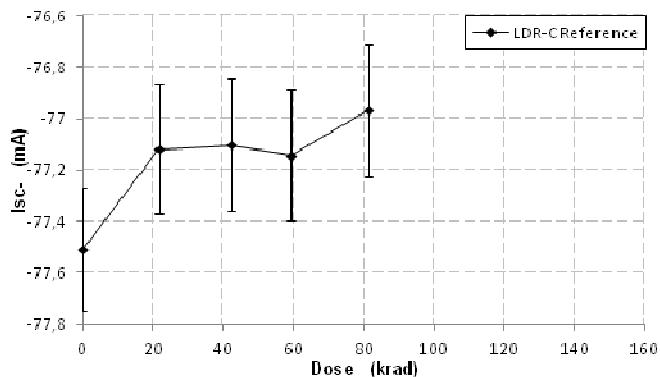

Contact

AIT Austrian Institute of Technology GmbH
Donau-City-Straße 1, 1220 Wien, Austria

www.ait.ac.at
Fax +43 (0) 50550-2201

Dr. Peter Beck
Nanodosimetry
+43 (0) 50550-4305
hubert.brückl@ait.ac.at

Mag. Dr. Susanne Kiefer
Marketing
+43 (0) 50550-3579
susanne.kiefer@ait.ac.at

Mag. Shweta Kumar
Sekretary
+43 (0) 50550-4300
Kerstin.formanek@ait.ac.at